

→ Rail width 46 mm

Single extension

Load bearing capacity up to 45 kg with self-closing mechanism and Smuso soft-closing mechanism




Continuous monitoring in accordance with the maximum stress level to DIN-EN 15 338, test parameter 3, ensures durable quality of the drawer runners.

- Material: Steel and plastic
- Finish/colour: Galvanized, black galvanized or white coated, grey plastic
- Version: With integrated self and soft closing mechanisms, cover caps at rear of cabinet rail and centre rail with buffer action, can be disengaged using release lever

Function




Self-closing mechanism in closed position Self-closing mechanism with integrated soft-closing mechanism in open position



Cover cap with buffer action between centre and drawer rail


Drilling pattern

Cabinet front edge

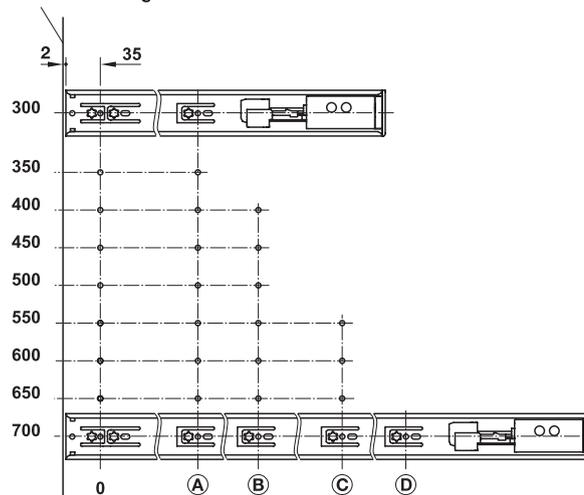

Length mm	A	B	C	D
300	96	–	–	–
350	160	–	–	–
400	128	192	–	–
450	128	256	–	–
500	128	288	–	–
550	128	224	352	–
600	128	224	384	–
650	128	288	416	–
700	128	224	352	480

Installation



Installation length L mm	Extension length AL mm	Load bearing capacity kg	Black galvanized	Galvanized	White coated
300	150	18	432.16.330	432.16.930	432.16.730
350	280	23	432.16.335	432.16.935	432.16.735
400	380	23	432.16.340	432.16.940	432.16.740
450	430	36	432.16.345	432.16.945	432.16.745
500	480	36	432.16.350	432.16.950	432.16.750
550	530	45	432.16.355	432.16.955	432.16.755
600	580	41	432.16.360	432.16.960	432.16.760
650	630	36	432.16.365	432.16.965	432.16.765
700	680	32	432.16.370	432.16.970	432.16.770

Packing: 1 pair

Base mounted

► FF 7.37

Information

► FF 7.7